


Data Sheet

Connectors

Multiswitch Series L und V Codicount Series 100

The connectors fit with **Multiswitch series L and V** and **Codicount series 100**.





Connectors are available with different soldering pins.

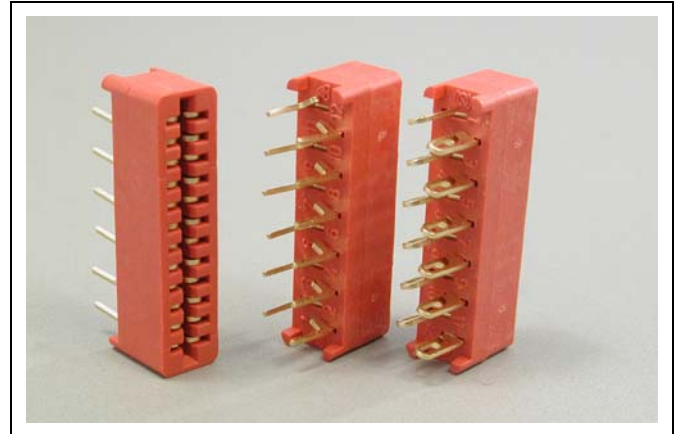

Technical Data

Number of contacts	12
PCB thickness	0.8 ± 0.1 mm
Pitch spacing	1.905 mm
Max. current per contact	1 ADC / 1 AAC
Max. voltage	42 VDC / 42 VAC
Test voltage	1000 V
Transition resistance	< 15 mΩ
Insulation resistance	10 ⁶ mΩ
Ambient temperature	-60°...+100 °C
Insertion force	17 N
Extraction force	12 N
Color of housing	red
RoHS compliant	yes

Dimensions

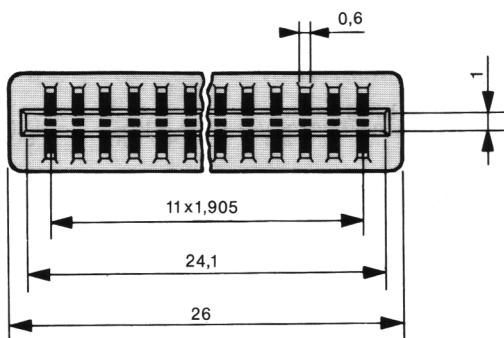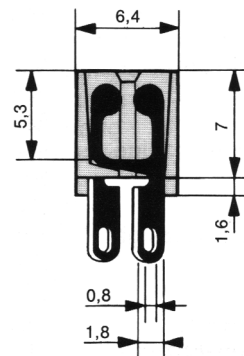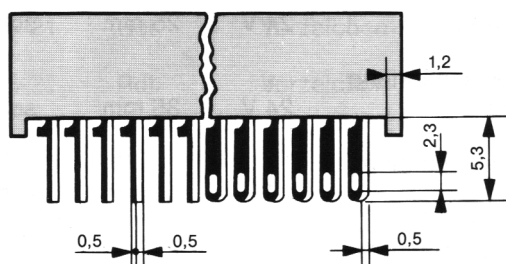


Order Numbers

Order numbers

CU 300644
without flange
with solder loops

Connector shapes



CU 300645
without flange
with solder pins short

