


Data Sheet

Miniature Rotary Coded Switch SRK

- 10 positions
- Gold plated contacts and terminals
- RoHS compliant

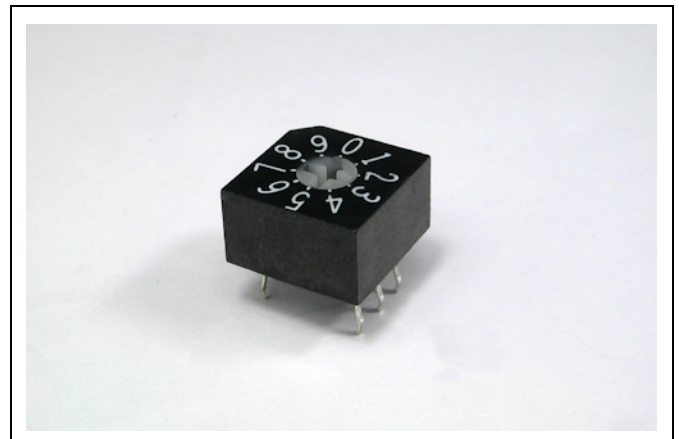


Technical Data

Max. operating voltage	50 VDC
Max. current (carrying capacity)	100 mADC
Max. switching	0.8 W
Contact resistance	< 100 mΩ
Insulation resistance (at 10 VDC)	> 100 mΩ
Test voltage (1 min.)	250 VAC
Capacity between 2 switches (at 1.000 KHz)	< 5 pF
Life expectancy	10.000 steps
Operating temperature	-10° ... +60°C
Storage temperature	-20° ... +85°C

Unless otherwise specified, components for wave soldering are limited to

- a pre-heat temperature of 100 °C max. for 60 s max. and
- a soldering temperature of 260 °C max. for 5 s max.


Dimensions

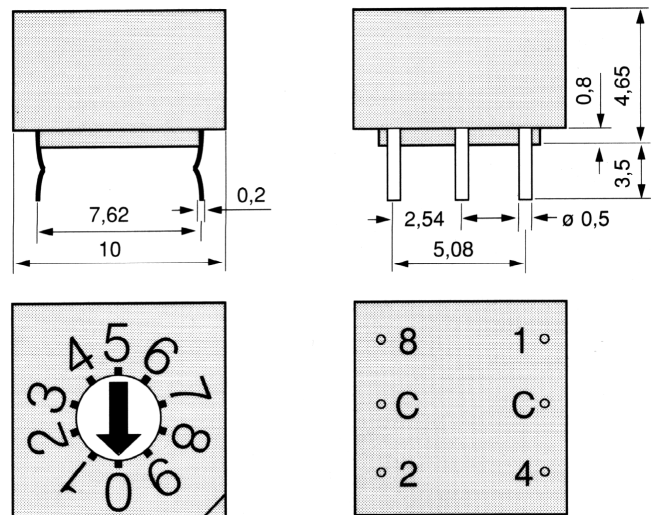

Order Number Configuration

① Type		SRK
② No. of positions	10 positions	10
③ Style	standard (flat)	-

Ordering Key



- ① Type
- ② No. of positions
- ③ Style

Specifications are subject to change without notice.